


TEKNIKUM® Drain-well sealing mat

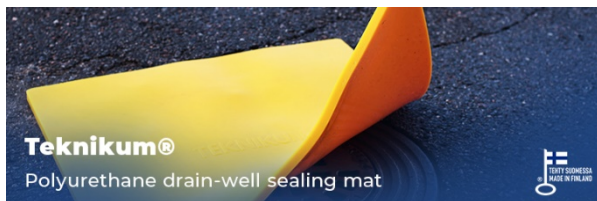

APPLICATIONS

Teknikum® Drain-well sealing mat is designed to cover rainwater outlets and drain-wells to prevent hazardous chemicals or oil from entering the drainage network.

Drain-well sealing mats are manufactured from soft polyurethane, which has an excellent sealing effect against a surface. The material is very oil- and chemical-resistant.

Teknikum® drain-well sealing mat comes with a storage bag equipped with a handle.

ADVANTAGES

- Provides environmental safety
- Suitable for chemical tank trucks as safety accessory

TECHNICAL PROPERTIES

Structure

Drain-well sealing mat:

- Soft polyurethane
- Yellow alarm color

Storage bag:

- Black naylor

Temperature range

- 40°C... +100°C

ENVIRONMENTAL RESISTANCE

- Weather-resistant
- Chemical-resistant

Conditions of use and storage

Store wrapped in a roll in its own storage bag, protected from UV radiation, dirt and weather. The recommended storage temperature is + 25 ° C and products should be stored away from heat sources and protected from direct sunlight.

Pay attention to dry storage. The relative humidity of the stored atmosphere should be less than 65%.

USER INSTRUCTIONS

Before applying the mat, remove loose stones and other debris that prevents condensation around the well.

Choose a mat of the right size that sufficiently extends beyond the edges of the drain.

After use, the barrier mat can be washed with a mild detergent and water. Dry the carpet well before storage.

Check the condition of the mat regularly and replace the product with a new one if necessary.

Note!

The mat is intended only for temporary use. Do not leave the drain-well sealing mat in place permanently.

RECYCLING

For decommissioned barrier mats, the correct disposal method is recovery as energy waste, in an appropriate incineration process.

MANUFACTURER

Teknikum Oy (Business ID FI07645274),
Nokiankatu 1, 38210, Sastamala, Finland

More information

sales@teknikum.com

www.teknikum.com

© All rights reserved by Teknikum Group
2020



ORDER REFERENCE

Product code	Size mm	Thickness mm	Weight kg
PL12ES10PK	615 x 615	12	6,0

REFERENCE IMAGES

