


Teknikum MULTI-TEK™ D UPE

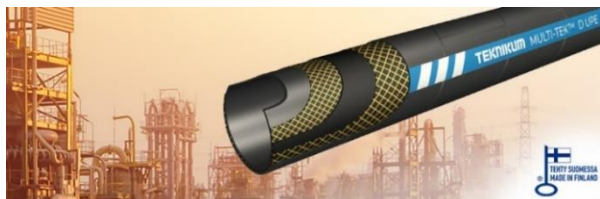

APPLICATIONS

Multipurpose delivery hose corresponding to high quality standards in chemical industry. The hose is suitable for approximately 98 % of the most common industrial chemicals.

The life cycle of the hose depends on the concentration and the temperature of transferred chemicals. Suitability of chemicals needs to be checked case specifically.

ADVANTAGES

- Multipurpose and suitable for almost all chemicals
- Excellent weather and ageing resistance
- High mechanical strength
- High burst pressure $\geq 6,4$ MPa
- Suitable with many types of couplings

STANDARD/ COMPLIANCE

Meets the requirements of chemical hose standard EN 12115:2021.

FDA-approved material (CFR 21 § 177.1520).

ATEX compliance (EC 2014/34/EU), equipment group II / category 2.

TECHNICAL PROPERTIES

Structure

- Tube: black UHMWPE-film (Ultra High Molecular Weight Polyethylene)
 - smooth
 - chemical resistant
 - FDA-approved material
- Reinforcement: textile
- Cover: black EPDM
 - smooth
 - chemical resistant
 - wear and weather resistant
 - non-flammable
- Burst safety factor 4 x working press.

Temperature range

- 40°C... +100°C

Electrical properties

- Meets the requirements of EN 12115:2021
- Hose type: Ω/T
- Conductive tube and cover $R \leq 10^6 \Omega$ / length
- Conductive through the hose wall $R \leq 10^9 \Omega$
- ATEX compliance (EC 2014/34/EU), equipment group II / category 2.

MAINTENANCE & NOTES

Washing

Before using in food industry, the hose lining must be cleaned. Ask washing and disinfection recommendations from our sales.

SUITABLE COUPLINGS AND CLAMPS

We recommend hose couplings according to EN 14420-7 and clamps according to EN 14420-3.

MANUFACTURER

Teknikum Oy (Business ID FI07645274),
Nokiankatu 1, 38210, Sastamala, Finland

More information









sales@teknikum.com

www.teknikum.com

© All rights reserved by Teknikum Group
2020



ORDER REFERENCE

Product code 	Ø i.d. mm 	Ø o.d. mm 	Working press. MPa 	Vacuum max. MPa 	Bending radius mm 	Weight kg/m 	Length m 
H2800BC013	13	23	1.6	0,05	52	0,40	40
H2800BC019	19	31	1.6	0.05	76	0,50	40
H2800BC025	25	37	1.6	0.04	100	0,60	40
H2800BC032	32	44	1.6	0.04	128	0,70	40
H2800BC038	38	51	1.6	0.04	152	1,10	40
H2800BC050	50	66	1,6	0.03	200	1,60	40

Other dimensions available on request.

MARKINGS



Also embossed standard markings:

TEKNIKUM - EN 12115:2021 - UPE - FDA - D - (id) - 16bar - -40°C/+100°C - Ω/T - quarter/year