


FUEL-TEK® ARCTIC 2410 LT

technikum.com/en/chemical-and-petrochemical-hoses/fuel-tek-arctic-2410-lt-2

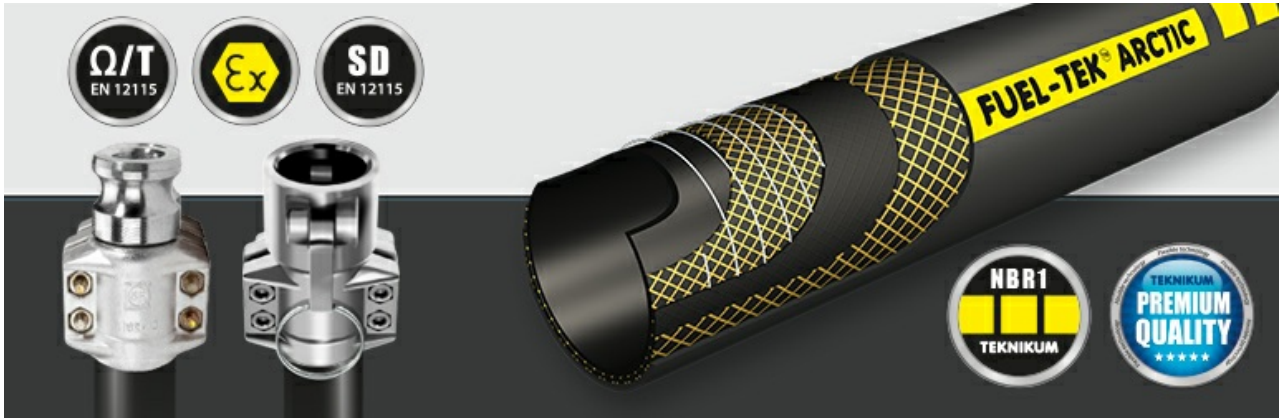

Suction and delivery hose

Applications:

Fuel-Tek® Arctic is a special version of Fuel-Tek® developed particularly to cold and freezing operating conditions. The hose maintains its familiar high quality flexibility even in the temperature of -40 °C. As other Fuel-Tek® hoses, Arctic is suitable for gasoline, diesel oil and oil mixed water. Additionally the hose meets the requirements of German standard TRbF 131/2 for Ω-type hoses.

TEMPERATURE RANGE: -40°C...+100°C

CONSTRUCTION:

Tube: black NBR1, oil and fuel resistant

Reinforcement: textile and steel spiral

Cover: black CR, antistatic, wear and weather resistant, non-flammable

Safety factor: 4

NOTE:

The hose meets the requirements of EN 12115:2011 standard for chemical hose type of Ω/T, meaning that electrically conductive layer resistance is $< 10^6 \Omega$ per length and $\leq 10^9 \Omega$ through the hose wall. We recommend hose couplings according to EN 14420-7 and clamps according to EN 14420-3.

Technical information

Product code	∅ i.d. mm	∅ o.d. mm	Working press. MPa	Vacuum max. MPa	Bending radius mm	Weight kg/m	Length m
2410LT019	19	31	1,0	0,09	76	0,70	40
2410LT025	25	37	1,0	0,09	100	0,90	40
2410LT038	38	51	1,0	0,09	152	1,30	40
2410LT045	45	59	1,0	0,09	180	1,40	40
2410LT050	50	66	1,0	0,09	200	2,00	40
2410LT075	75	91	1,6	0,09	300	2,00	40
2410LT076	76	92	1,0	0,09	304	2,20	40
2410LT100	100	116	1,0	0,09	400	4,10	40

Sales - Industrial hoses

The Nordic Countries • sales@technikum.com

Central Europe • sales.de@technikum.com

Russia • sales.ru@technikum.com