


SL CLAMP

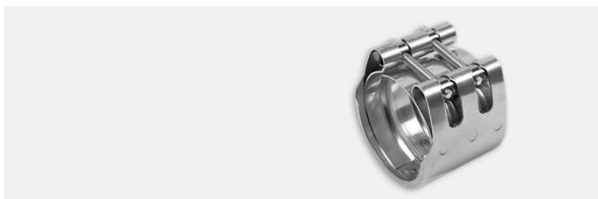

APPLICATIONS

Special clamp for assembling dairy coupling.

Corrugated inner surface, two tightening screws and clamp collar ensure by two ways that the coupling stays in hose: by tightening the hose on the hose shank and by locking the coupling behind the clamp collar.

The clamp may also be welded to dairy pipelines which are equipped with ready-installed ring. The ring guarantees the right installation of the SL-clamp and the hose.

The material of the clamp is acid proof steel AISI 316L / EN 1.4404.

There is also available separate spare part to SL-clamps. Bolts and nuts are sold as single pieces.

ADVANTAGES

- Safe and durable
- For high hygienic requirements

TECHNICAL PROPERTIES

Material

- Clamp:
 - stainless steel AISI 316L / EN 1.4404

SUITABLE COUPLINGS

- Dairy coupling

SALES

Teknikum Oy (Business ID FI07645274),
Nokiankatu 1, 38210, Sastamala, Finland

More information

sales@teknikum.com

www.teknikum.com



ORDER REFERENCE

SPARE PART NUTS FOR CLAMPS		
Product code	Thread	In connection to
SLMUT025	M5	SLRUV025
SLMUT040	M6	SLRUV040
SLMUT050	M6	SLRUV050
SLMUT065	M8	SLRUV065
SLMUT075	M8	SLRUV075
SLMUT102	M8	SLRUV102

Product code	Hose i.d. mm	Hose o.d. mm	Connection screws	Mounting screws
COMPLETE CLAMPS				
SLKIR025	25	36	2xM5x25	2xM5x35
SLKIR040	40	51	2xM6x30	2xM6x50
SLKIR050	50	62	2xM6x30	2xM6x50
SLKIR065	63 / 65	81	2xM8x40	2xM8x60
SLKIR075	75	91	2xM8x40	2xM8x60
SLKIR102	102	116	2xM8x40	2xM8x60

SPARE PART BOLTS FOR CLAMPS		
Product code	Bolt/Screw	In connection to
SLRUV025	1xM5x25	SLMUT025
SLRUV040	1xM6x30	SLMUT040
SLRUV050	1xM6x30	SLMUT050
SLRUV065	1xM8x40	SLMUT065
SLRUV075	1xM8x40	SLMUT075
SLRUV102	1xM8x40	SLMUT102

INSTALLATION RINGS TO BE WELDED INTO PIPELINE			
Product code	i.d mm	o.d mm	Thickness mm
SLREN025	25,6	31,9	2,5
SLREN040	38,3	47,5	3
SLREN050	51,2	60,2	3
SLREN063	63,3	73,7	3
SLREN065			
SLREN075	76	86,5	3
SLREN102	102	116,5	3