


# PAVE™ 2,0 / 2,5 MPa

 [teknikum.com/en/steam-water-and-compressed-air-hoses/pave-20-25-mpa-2](https://www.teknikum.com/en/steam-water-and-compressed-air-hoses/pave-20-25-mpa-2)

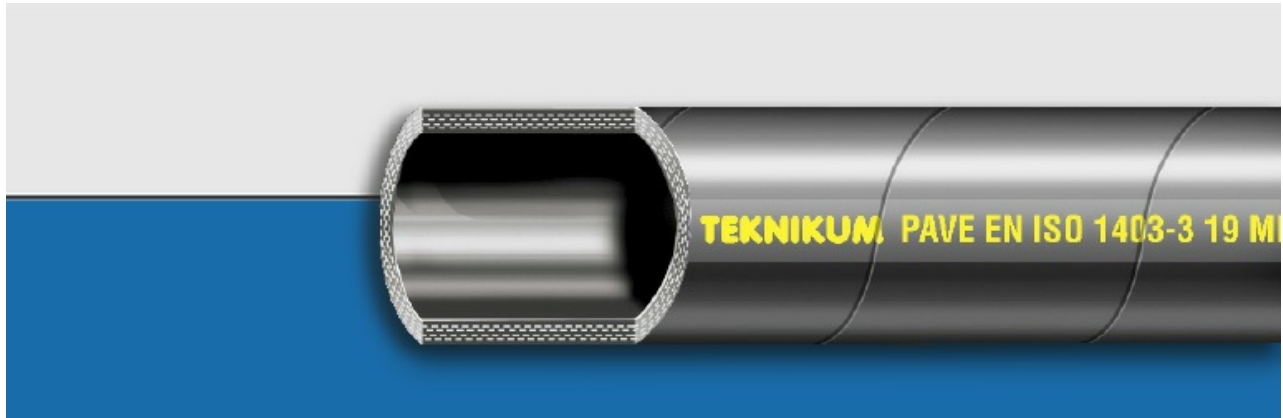

Pressure hose

## **Applications:**

A multipurpose compressed air and water hose. The hose meets requirements of standard EN 1403:2005 class 3 and EN 2398:2010 3A / L-T when inner diameter is 6-25 mm.

## **TEMPERATURE RANGE:**

-40°C...+80°C

## **CONSTRUCTION:**

### **Ø i.d. 6-25 mm:**

**Tube:** black EPDM/SBR

**Reinforcement:** textile

**Cover:** black EPDM/SBR

### **Ø i.d. 32-50 mm:**

**Tube:** black EPDM

**Reinforcement:** textile

**Cover:** black EPDM

**Safety factor:** 4

## **NOTE:**

We recommend [quick hose couplings](#) and [safety clamp](#) according to EN 14420 or [Kerko clamp](#).

## **Technical information**

<b>Product code</b>	<b>Ø i.d. mm</b>	<b>Ø o.d. mm</b>	<b>Working press. MPa</b>	<b>Bending radius mm</b>	<b>Weight kg/m</b>	<b>Length m</b>
PAVE25006	6	14	2,5	50	0,20	60
PAVE25008	8	16	2,5	50	0,20	60
PAVE25010	10	18	2,5	60	0,20	60
PAVE25013	13	22	2,5	90	0,30	60
PAVE25016	16	25	2,5	100	0,40	60
PAVE25020	19	29	2,5	120	0,50	60
PAVE25025	25	35	2,5	150	0,70	60
PAVE20032	32	46	2,0	180	1,00	40
PAVE20040	40	54	2,0	220	1,20	40
PAVE20045	45	59	2,0	320	1,40	40
PAVE20050	50	64	2,0	400	1,50	40

## Sales - Industrial hoses

**The Nordic Countries** • [sales@technikum.com](mailto:sales@technikum.com)

**Central Europe** • [sales.de@technikum.com](mailto:sales.de@technikum.com)

**Russia** • [sales.ru@technikum.com](mailto:sales.ru@technikum.com)