


Teknikum AGRI-TEK™ SD

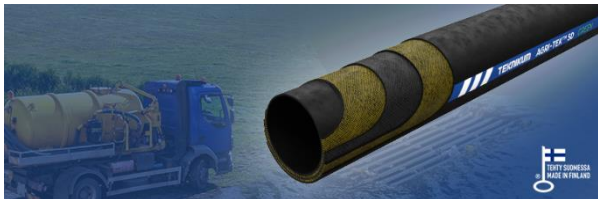

APPLICATIONS

A durable and robust suction and delivery hose for handling mixed water in agricultural and municipal applications. The hose is multipurpose and suitable for wide range of work requiring wear-resistance such as loading or unloading mixed water, wastewater or use in tank trucks collecting sewage or slurry.

ADVANTAGES

- Cost-efficient abrasive qualities, wear-resistant
- Safe and durable hose
- Flexible structure, easy to handle
- Antistatic
- Quick and easy installation
- Hoses can be cut on-site

TECHNICAL PROPERTIES

Structure

- Tube:
 - Rubber: Teknikum WearBlack™ SBR antistatic
 - smooth
 - wear-resistant
- Reinforcement: textile and steel spiral
- Cover:
 - Rubber: Teknikum WearBlack™ SBR antistatic
 - smooth: HLIP050-HLIP125
 - corrugated: HLIP150-HLIP200
 - wear and weather resistant
- Burst safety factor 3 x working press.

Temperature range

-40°C...+80°C

SUITABLE COUPLINGS AND CLAMPS

We recommend band clamp for hose tightening.

MANUFACTURER









Teknikum Oy (Business ID FI07645274),
Nokiankatu 1, 38210, Sastamala, Finland

More information

sales@teknikum.com
www.teknikum.com



ORDER REFERENCE

Product code	Ø i.d. mm	Ø o.d. mm	Working press. bar	Vacuum max. bar	Bending radius mm	Weight kg/m	Length m
							
HLIP050	50	61	6	0,9	120	1,3	40
HLIP063	63	74	6	0,9	210	1,6	40
HLIP075	76	88	6	0,9	310	2,0	40
HLIP090	90	103	6	0,9	350	2,9	40
HLIP100	102	114	6	0,9	360	3,1	40
HLIP115	115	127	6	0,9	430	3,4	20
HLIP125	127	141	6	0,9	450	3,7	20
HLIP150	152	168	6	0,9	520	5,8	20
HLIP200	203	221	6	0,9	690	8,2	10

Other dimensions available on request.

MARKINGS

